
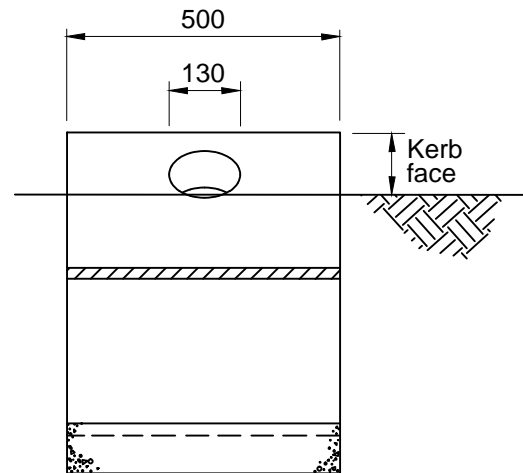


Top & Base Block

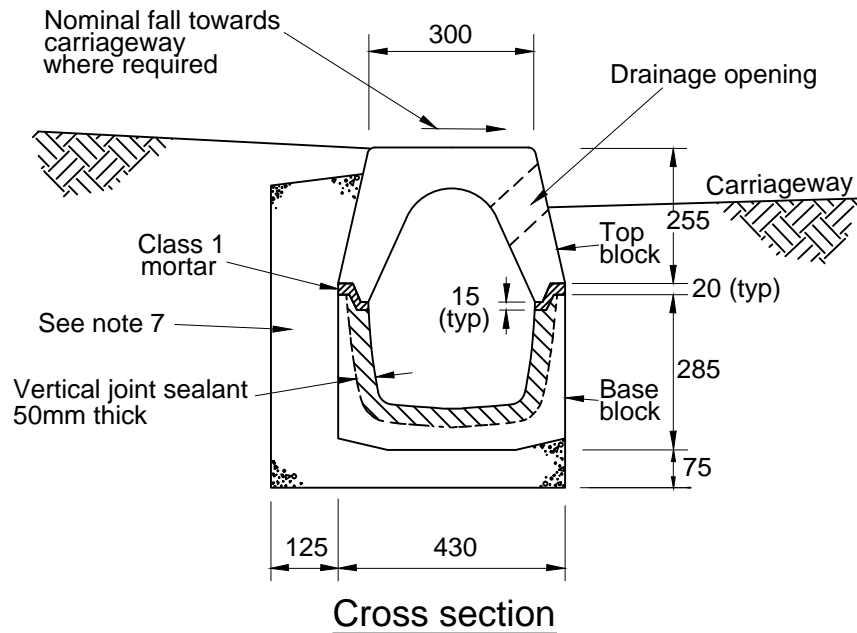

Notes:

1. (NGSHW) Clause 516/517. Class D channels are designed to withstand loadings of all types of road vehicle that are permitted on trunk roads including motorways. Class C channels should only be installed in locations which are protected from direct traffic loading, e.g. in areas behind safety barriers.
2. All joints are to be fully watertight and sealed.
3. The in-situ concrete bed and haunch shall be cast to form a single homogenous mass.
4. When laid adjacent to existing construction the existing construction shall be saw cut.
5. Installation shall be in accordance with the manufacturer's written recommendations.
6. All products must have Service Managers acceptance to use.
7. Installations shall be in accordance with the manufacturers specification.

All dimensions are in millimetres unless otherwise stated.



Drawing Title:

Standard Detail Kerb Drain - Type 2

Version	Amendment	Date
Checked By: B. Bartlett	Drawing Number: SD-1100-10	Version: -
Date Issued: Oct 16		