




**Tactile surface pattern**



\* Except where epoxy fixed flexible units are specified.

Module Type	Size	Pitch Dimension	
		A	B
A	400 Sq.	66.8	33
B	450 Sq.	64	33
		Tolerance $\pm 2$	

**Module Type B - 7 Domes**

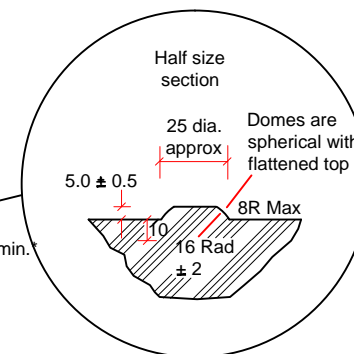

**Notes**

1. All dimensions are in millimetres.
2. Red modules are used for controlled crossings.
3. Buff modules or those in a contrasting colour to the adjacent surface are used for uncontrolled crossings.
4. The tactile surface may be constructed from any material suitable for paving footway surfaces, as instructed by the engineer.
5. For the tactile paving layouts refer to the scheme drawings and to the DFT guidance on the use of tactile paving surfaces.
6. Domes are to be aligned with the direction of travel over the crossing point. The paving units shall be aligned on both sides of the carriageway.



# Standard Detail Tactile Paving Units

Version	Amendment	Date
Checked By: R.Harman	Drawing Number: SD-1100-18	Version: -
Date Issued: Oct 16		